



# IC-R9500

Professional Communications Receiver



BPF UNIT  
ANT UNIT

RF-A UNIT

# Professional communications receiver

with 0.005 to 3335MHz coverage and high performance spectrum scope



The IC-R9500 is a high-end professional communications receiver for wideband monitoring, signal detection, spectrum analysis, recording received signals, and more.

#### Main features

- 0.005–3335MHz wideband coverage
- +40dBm 3rd order intercept point and 109dB dynamic range\* (\*At 14.1MHz)
- Multi-function high performance spectrum scope
- $\pm 0.05$ ppm high frequency stability
- $\pm 3$ dB\* accuracy of dB $\mu$ /dB $\mu$ (emf)/dBm meter (\*10 to 70dB $\mu$  signal between 100kHz to 3335MHz at 25°C)
- SSB/CW/AM mode auto tuning function
- Optional P25 digital mode reception
- Professional grade operation, functionality and build



# Dual DSP units provide superb receiver

## BASIC PERFORMANCE

### Wideband coverage




The IC-R9500 covers 0.005–3335MHz in SSB, AM, FM (WFM), CW, FSK and P25\* modes. It is suitable for a wide variety of radio monitoring and listening activities.

\* Optional UT-122 digital unit is required.

### Superb receiver performance

The IC-R9500 achieves amazing performance by using a D-MOS FET array in the 1st mixer (below 30MHz) and an excellent IMD roofing filter.

The IC-R9500 has +40dBm IP3 and 109dB dynamic range at 14.1MHz. IP3 performance is +9.8dBm at 50MHz and +6.2dBm at 620MHz (+5dBm (typical) from 30MHz to 3335MHz).

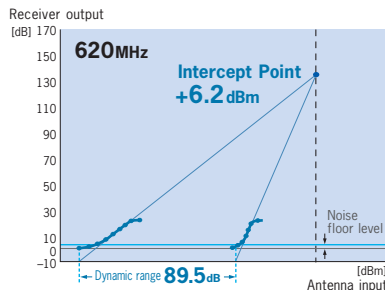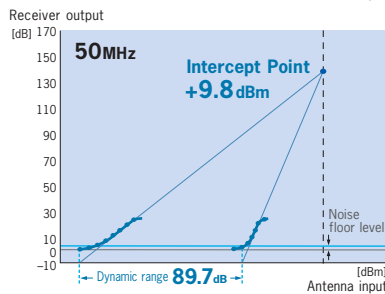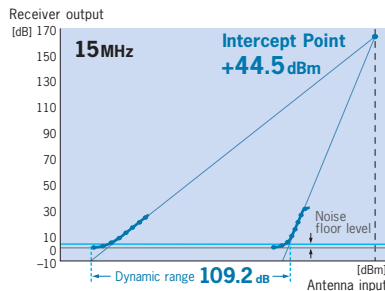

### Five roofing filters

The IC-R9500 has 5 independent roofing filters (240, 50, 15, 6 and 3kHz) for improved selectivity. In very crowded RF spectrum conditions, it is extremely important to protect against strong in-band signals. The 3kHz roofing filter provides a 130dB (approx.)\* blocking dynamic range.

\* At 15MHz reception, with 5kHz separation signals.



Five roofing filters

### Dual DSP

The IC-R9500 incorporates two independent, 32-bit floating point DSP units, a dedicated DSP unit for receiver functions and another for the spectrum scope. By using the power of two independent DSP units, the radio can respond to operator changes in an instant.



Dual DSP units

### ±0.05ppm high frequency stability

The IC-R9500 uses an OCXO (Oven Control Crystal Oscillator) unit which provides ±0.05ppm frequency stability from 0°C to 50°C. The 10MHz reference frequency can either be supplied to or input from external equipment.



OCXO unit

### Digital IF filter


The digital IF filter\* allows the operator to adjust the filter shape (sharp or soft), filter bandwidth, and center frequency characteristics. The digital twin PBT narrows and shifts the IF passband to efficiently eliminate undesired signals.

\* For FM, WFM and P25 mode, the passband width is fixed.




Digital twin PBT setting example


### SSB sharp filter characteristics

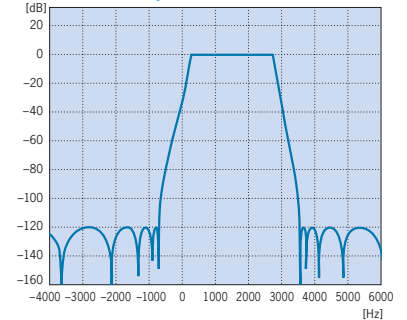

### FM filter characteristics

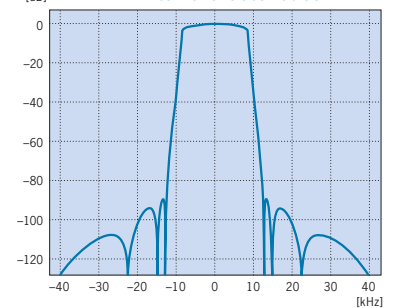

### AM filter characteristics

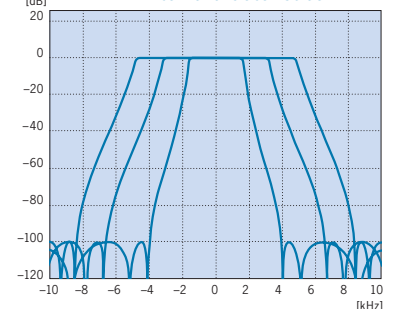

# performance and spectrum analysis

## SPECTRUM SCOPE


### Multi function spectrum scope

Using a dedicated DSP unit improves the dynamic range of the spectrum scope. The IC-R9500 has four different spectrum modes such as normal/wide and center/fixed width. The normal spectrum scope covers a range from  $\pm 2.5\text{kHz}$  to  $\pm 5\text{MHz}$ , while the wide band spectrum scope\* observes up to  $\pm 500\text{MHz}$  ( $\pm 10\text{MHz}$ ,  $\pm 25\text{MHz}$ ,  $\pm 50\text{MHz}$ ,  $\pm 100\text{MHz}$   $\pm 250\text{MHz}$  and  $\pm 500\text{MHz}$  selectable). When using the


normal spectrum scope, the digital scope's filter width can vary from 200Hz to 20kHz with a variable sweep speed. The spectrum scope can also be set to use specific scope edges or to center the span on the receiving frequency. The peak search function automatically moves the display marker to the strongest signal on the scope screen. In addition to these features, the scope has 3 levels of attenuation (10dB, 20dB, 30dB).

\* While using the wide band scope function, AF output is muted.


- Fixed mode ... the scope screen does not shift when you change the receiving frequency.
- Center mode ... the scope screen shifts as the receiving frequency moves. The receiving frequency is always centered on the scope screen.
- Wide band scope receives up to  $\pm 500\text{MHz}$ .
- Sweep speed/span/filter width setting
- Peak search function
- Peak hold function
- Attenuator
- Mini scope function

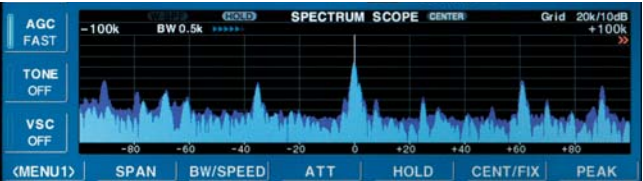


Center mode setting example

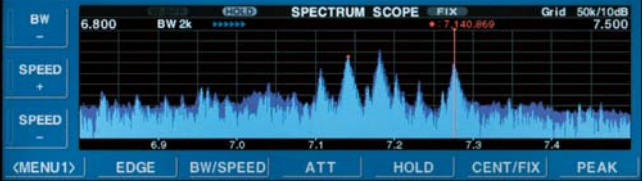

Fix mode setting example

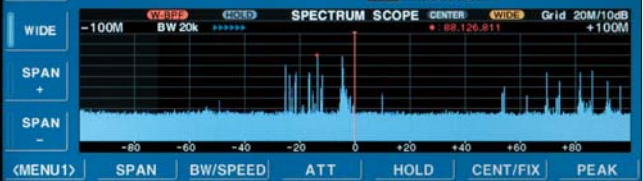

Wide band scope example ( $\pm 100\text{MHz}$ )

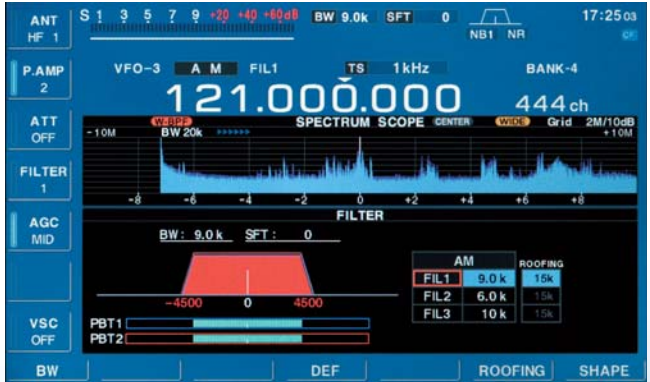

Mini scope function example



Monitor and connection cable

# Multiple functions and sophisticated oper


## FUNCTIONS

### 7-inch wide color TFT LCD

The large 7-inch wide (800 × 480 pixels) active matrix display delivers quick response time, high resolution and has a wide viewing angle. The multi-function spectrum scope is displayed in vivid color. The background color is selectable from black or blue for your preference. In addition, the IC-R9500 has a VGA connector allowing you to connect an external monitor.

### Multiple RSSI

S-meter, dBμ, dBμ(emf) and dBm meter types are selectable in the IC-R9500. The dBμ, dBμ(emf) and dBm meter have ±3dB of accuracy (10 to 70dBμ signal from 100kHz to 3335MHz at 25°C).

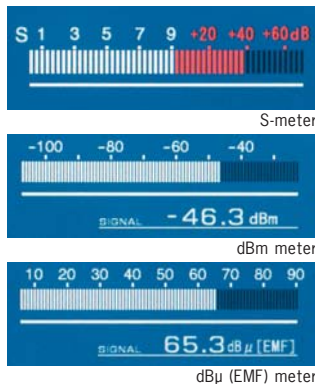

### Noise blanker


The IC-R9500 has a DSP controlled noise blanker that significantly reduces pulse type noise and improves the S/N ratio by removing interfering noise. The noise blanker has two channels with adjustable width and depth parameters. You can use these to target the specific noise interference.

### Noise reduction

The noise reduction function separates signal components from random noise through Digital Signal Processing (DSP) and enhances the signals buried in noise for improved signal readability.

### Two-point manual notch filter

The digital manual notch filter has a depth of more than 70dB at two points with adjustable filter width (wide, middle, narrow). This means that two strong beat signals can be eliminated at once even while using the auto notch filter.

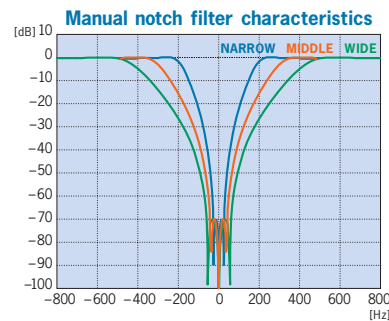

### Synchronous AM detection

The synchronous AM (S-AM) detection provides less distorted audio than normal diode detection. This mode is useful when fading occurs or signal level is low. The IC-R9500 can recreate the carrier signal exactly by using the DSP. In addition, upper or lower sideband demodulation for S-AM is selectable for eliminating interference from adjacent strong signals.

### FSK modulator & decoder

The IC-R9500 has built-in FSK demodulator and decoder.

- Twin peak filter
- Water-fall indicator
- FSK-R mode
- FSK tone and shift frequencies programmable

### 10 VFOs


The IC-R9500 has 10 VFO channels for tuning and storing operating frequencies, mode, filter width and other settings. For example, use VFO-1 for the 7MHz band, VFO-2 for the VHF marine band,

VFO-3 for the 1200MHz band, etc. You can quickly change the operating bands with the 10-key pad. When the VFO is changed, the settings are automatically stored in that VFO channel.

### A total of 1220 memory channels

The IC-R9500 has a total of 1220 memory channels. Store frequencies, modes, filter width and tuning steps. Memory channels are grouped into 10 memory banks. By connecting to a USB keyboard, you can edit memory contents directly.

- 1000ch regular memory channels
- 20ch scan edge channels
- 100 auto memory write channels
- 100 memory scan skip channels

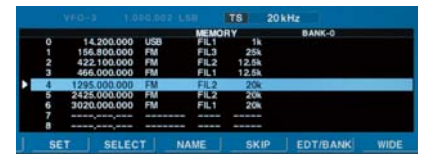

Memory setting example

### Digital voice recorder

The IC-R9500 has two types of digital voice recorders. One is the regular recorder, recording for long periods in "WAV" format into the built-in CF memory or an external USB memory. The sampling rate is variable from 8kHz (SQ1) to 48kHz (SHQ). In SQ1 mode, up to 130 minutes (approx.) of recorded audio can be stored into the CF memory. The other recorder is the short voice recorder, which saves the previous 15 seconds of radio audio into RAM, allowing you to play back the audio instantly.



Voice recorder setting example

# ations allowing efficient radio monitoring

## Multi-scan functions

Numerous scanning functions to search for desired stations are available to make operation easier. The IC-R9500 scans 40 channels per second in memory scan mode.

- Memory scan
- Program scan
- Fine program scan
- $\Delta F$  scan/ $\Delta F$  fine scan
- Priority scan
- Selected mode memory scan
- Selected memory scan
- Auto memory write scan
- Tone scan

## Voice synthesizer

The built-in synthesizer announces the receiving frequency, mode and signal strength in English.

## USB connector

The IC-R9500 has a USB connector for connecting external USB memory or other USB devices. Received audio and the receiver configuration files can be imported and exported to a PC. Firmware upgrades are also possible via USB memory.

## Various receive assist functions\*1

- SSB/CW/AM mode auto tuning function
- AFC function compensates for frequency shifts (FM/WFM mode only)
- Preamp and attenuator
- 1/4 tuning step function and dial click function
- CW-R (reverse) mode
- APF (Audio Peak Filter)
- AGC (Automatic Gain Control)
- VSC (Voice Squelch Control)
- Input overload protection (HF bands only)


- Optional P25 digital mode reception
- Optional CI-V interface and RS-232C for PC remote control
- Analog TV tuner (NTSC/PAL/SECAM)\*2

\*1 Some functions are not available depending on operating mode or band.

\*2 Except USA version

## Additional outstanding features

- 4 antenna connectors: an SO-239 type, a phono (RCA) connector and two type-N connectors
- S/P DIF output jack
- Video input/output
- Clock function with daily timer and sleep timer
- CTCSS and DTCS tone squelch
- Simplified frequency calibration using WWV or WWVH
- Dial lock function
- Panel lock function
- Adjustable tuning step
- Dimmer function
- Monitor function

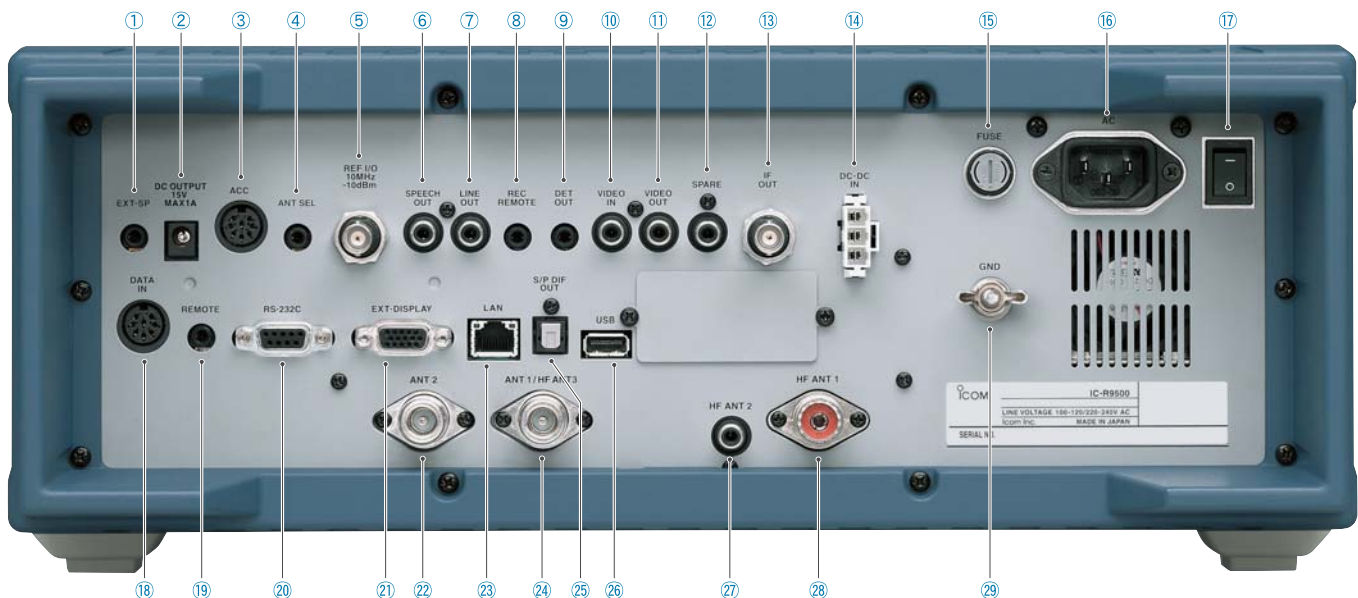

- ① External Speaker Jack
- ② External DC Output Jack (15.0V)
- ③ ACC Socket
- ④ Antenna Selector Jack
- ⑤ Reference Frequency In/Out Terminal
- ⑦ Line Output Jack
- ⑧ Recorder Remote Jack

- ⑨ Detector Output Jack
- ⑩ Video Input Jack
- ⑪ Video Output Jack
- ⑫ Spare Jack
- ⑬ IF Output Jack
- ⑭ DC-DC Power Socket
- ⑮ Fuse Holder
- ⑯ AC Power Socket

- ⑰ Main Power Switch
- ⑱ Data Input Socket
- ⑲ CI-V Remote Control Jack
- ⑳ RS-232C Connector
- ㉑ External Display Connector
- ㉒ Antenna Connector 2
- ㉓ Ethernet Connector

- ㉔ Antenna Connector 1/  
HF Antenna Connector 3
- ㉕ S/P DIF Output Terminal
- ㉖ USB Connector
- ㉗ HF Antenna Connector 2
- ㉘ HF Antenna Connector 1
- ㉙ Ground Terminal

# SPECIFICATIONS

## GENERAL

Frequency coverage (Unit: MHz)	0.005–3335.000000* * Cellular bands are blocked in the U.S.A. version.
France version	0.005 – 29.999999 50.200 – 51.200000 87.500 – 108.000000 144.000 – 146.000000 430.000 – 440.000000 1240.000 – 1300.000000
Mode	USB, LSB, CW, FSK, AM, FM, WFM, P25* * Optional UT-122 required.
Number of memory channels	1220 (1000 regular, 100 auto memory write channels, 100 memory scan skip and 20 scan edges)
Antenna connectors	SO-239 (50Ω for HF), Phono [RCA] (500Ω for HF), Type-N × 2 (50Ω one each for 30–1149.999999MHz, 1150–3335MHz)
Temperature range	0°C to +50°C; +32°F to +122°F
Frequency stability	Less than ±0.05ppm (at 25°C) after warm up (5 minutes)
Temperature fluctuation	Less than ±0.05ppm (0°C to +50°C)
Frequency resolution	1Hz
Power supply requirement	100V/120V/230V/240V AC
Power consumption (Representative value)	Stand-by Less than 100VA Max. audio Less than 100VA
Dimensions (W×H×D) (projections not included)	424 × 149 × 340 mm; 16 <sup>11</sup> / <sub>16</sub> × 5 <sup>7</sup> / <sub>16</sub> × 13 <sup>13</sup> / <sub>16</sub> in
Weight	20kg; 44.1lb (approx.)

### Supplied accessories

- AC power cable
- Carrying handles
- Spare fuses
- ACC plugs
- RCA plugs
- DC power plug
- Speaker plugs

## RECEIVER

Intermediate frequencies	HF 58.7MHz (1st)/10.7MHz (2nd)/48kHz (3rd) VHF/UHF 278.7MHz or 778.7MHz (1st)/ 58.7MHz (2nd)/10.7MHz (3rd)/48kHz (4th)																																								
Sensitivity	<table border="1"> <thead> <tr> <th></th> <th>SSB, CW, FSK</th> <th>AM</th> <th>FM</th> <th>FM50k</th> <th>WFM</th> </tr> </thead> <tbody> <tr> <td>0.100 – 1.799MHz*<sup>1</sup></td> <td>0.5μV</td> <td>6.3μV</td> <td>–</td> <td>–</td> <td>–</td> </tr> <tr> <td>1.800 – 29.999MHz*<sup>1</sup></td> <td>0.2μV</td> <td>2.5μV</td> <td>0.5μV*<sup>3</sup></td> <td>0.71μV*<sup>3</sup></td> <td>–</td> </tr> <tr> <td>30.0–2499.999MHz*<sup>2</sup></td> <td>0.32μV</td> <td>3.5μV</td> <td>0.5μV</td> <td>0.71μV</td> <td>1.4μV</td> </tr> <tr> <td>2500–2999.999MHz*<sup>2</sup></td> <td>0.32μV</td> <td>3.5μV</td> <td>0.5μV</td> <td>0.71μV</td> <td>1.4μV</td> </tr> <tr> <td>3000–3335.000MHz*<sup>2</sup></td> <td>1.0μV</td> <td>11μV</td> <td>1.6μV</td> <td>2.2μV</td> <td>4.5μV</td> </tr> </tbody> </table> <p>*<sup>1</sup> Preamp1 ON *<sup>2</sup> Preamp ON *<sup>3</sup> 28–29.999MHz SSB, FSK BW=2.4kHz, CW BW=0.5kHz, AM BW=6.0kHz at 10dB S/N, FM BW=15kHz, FM50k BW=50kHz, WFM BW=180kHz at 12dB SINAD</p>						SSB, CW, FSK	AM	FM	FM50k	WFM	0.100 – 1.799MHz* <sup>1</sup>	0.5μV	6.3μV	–	–	–	1.800 – 29.999MHz* <sup>1</sup>	0.2μV	2.5μV	0.5μV* <sup>3</sup>	0.71μV* <sup>3</sup>	–	30.0–2499.999MHz* <sup>2</sup>	0.32μV	3.5μV	0.5μV	0.71μV	1.4μV	2500–2999.999MHz* <sup>2</sup>	0.32μV	3.5μV	0.5μV	0.71μV	1.4μV	3000–3335.000MHz* <sup>2</sup>	1.0μV	11μV	1.6μV	2.2μV	4.5μV
	SSB, CW, FSK	AM	FM	FM50k	WFM																																				
0.100 – 1.799MHz* <sup>1</sup>	0.5μV	6.3μV	–	–	–																																				
1.800 – 29.999MHz* <sup>1</sup>	0.2μV	2.5μV	0.5μV* <sup>3</sup>	0.71μV* <sup>3</sup>	–																																				
30.0–2499.999MHz* <sup>2</sup>	0.32μV	3.5μV	0.5μV	0.71μV	1.4μV																																				
2500–2999.999MHz* <sup>2</sup>	0.32μV	3.5μV	0.5μV	0.71μV	1.4μV																																				
3000–3335.000MHz* <sup>2</sup>	1.0μV	11μV	1.6μV	2.2μV	4.5μV																																				
3rd order IMD dynamic range	109dB (typ.) at 14.1MHz, 100kHz separation, preamp OFF																																								
Selectivity (Representative value)	<table border="1"> <tbody> <tr> <td>USB, LSB, FSK (BW= 2.4kHz)</td> <td>More than 2.4kHz/ –3dB</td> </tr> <tr> <td></td> <td>Less than 3.6kHz/ –60dB</td> </tr> <tr> <td>CW (BW= 500Hz)</td> <td>More than 500Hz/ –3dB</td> </tr> <tr> <td></td> <td>Less than 700Hz/ –60dB</td> </tr> <tr> <td>AM (BW= 6kHz)</td> <td>More than 6.0kHz/ –3dB</td> </tr> <tr> <td></td> <td>Less than 15.0kHz/ –60dB</td> </tr> <tr> <td>FM (BW= 15kHz)</td> <td>More than 12.0kHz/ –3dB</td> </tr> <tr> <td></td> <td>Less than 25.0kHz/ –60dB</td> </tr> <tr> <td>WFM</td> <td>More than 180kHz/ –6dB</td> </tr> </tbody> </table>					USB, LSB, FSK (BW= 2.4kHz)	More than 2.4kHz/ –3dB		Less than 3.6kHz/ –60dB	CW (BW= 500Hz)	More than 500Hz/ –3dB		Less than 700Hz/ –60dB	AM (BW= 6kHz)	More than 6.0kHz/ –3dB		Less than 15.0kHz/ –60dB	FM (BW= 15kHz)	More than 12.0kHz/ –3dB		Less than 25.0kHz/ –60dB	WFM	More than 180kHz/ –6dB																		
USB, LSB, FSK (BW= 2.4kHz)	More than 2.4kHz/ –3dB																																								
	Less than 3.6kHz/ –60dB																																								
CW (BW= 500Hz)	More than 500Hz/ –3dB																																								
	Less than 700Hz/ –60dB																																								
AM (BW= 6kHz)	More than 6.0kHz/ –3dB																																								
	Less than 15.0kHz/ –60dB																																								
FM (BW= 15kHz)	More than 12.0kHz/ –3dB																																								
	Less than 25.0kHz/ –60dB																																								
WFM	More than 180kHz/ –6dB																																								
Spurious and image rejection ratio	<table border="1"> <tbody> <tr> <td>0.1 – 30.0MHz</td> <td>More than 70dB</td> </tr> <tr> <td>30.0 – 2500MHz</td> <td>More than 50dB</td> </tr> <tr> <td>2500 – 3000MHz</td> <td>More than 40dB</td> </tr> </tbody> </table>					0.1 – 30.0MHz	More than 70dB	30.0 – 2500MHz	More than 50dB	2500 – 3000MHz	More than 40dB																														
0.1 – 30.0MHz	More than 70dB																																								
30.0 – 2500MHz	More than 50dB																																								
2500 – 3000MHz	More than 40dB																																								
AF output power	More than 2.6W with an 8Ω load																																								

All stated specifications are subject to change without notice or obligation.

## OPTIONS

### CT-17

#### CI-V LEVEL CONVERTER

For remote receiver control using a PC with an RS-232C.



### UT-122

#### P25 DIGITAL UNIT

Provides APCO P25 digital mode reception.



### SP-20

#### EXTERNAL SPEAKER

4 audio filters; headphone jack; can connect to 2 receivers. Input impedance: 8Ω Max. Input power: 5W



• All screen images are simulated.

• The LCD display may have cosmetic imperfections that appear as small or dark spots. This is not a malfunction or defect, but a normal characteristic of LCD displays.

• If re-exporting this product, it is your responsibility to check you are in compliance with the export regulations of your country or the country you are exporting to. Export regulations can be highly restrictive in relation to some of the technology implemented in this product. Your failure to comply with export regulations may subject you to fines or penalties. Please consult with the relevant Government Department in your country.

## Icom Inc.

1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

URL: <http://www.icom.co.jp/world/index.html>

## Count on us!

### Icom America Inc.

2380 116th Avenue NE,  
Bellevue, WA 98004, U.S.A.  
Phone: +1 (425) 454-8155  
Fax: +1 (425) 454-1509  
E-mail: [sales@icomamerica.com](mailto:sales@icomamerica.com)  
URL: <http://www.icomamerica.com>

### Icom New Zealand

146A Harris Road, East Tamaki,  
Auckland, New Zealand  
Phone: +64 (09) 274 4062  
Fax: +64 (09) 274 4708  
E-mail: [inquiries@icom.co.nz](mailto:inquiries@icom.co.nz)  
URL: <http://www.icom.co.nz>

### Icom (UK) Ltd.

Unit 9, Sea St., Heme Bay,  
Kent, CT6 8LD, U.K.  
Phone: +44 (01227) 741741  
Fax: +44 (01227) 741742  
E-mail: [info@icomuk.co.uk](mailto:info@icomuk.co.uk)  
URL: <http://www.icomuk.co.uk>

### Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,  
Taipei, Taiwan, R.O.C.  
Phone: +886 (02) 2559 1899  
Fax: +886 (02) 2559 1874  
E-mail: [sales@asia-icom.com](mailto:sales@asia-icom.com)  
URL: <http://www.asia-icom.com>

Your local distributor/dealer:

### Icom Canada

Glenwood Centre #150-6165 Highway 17,  
Delta, B.C., V4K 5B8, Canada  
Phone: +1 (604) 952-4266  
Fax: +1 (604) 952-0090  
E-mail: [info@icomcanada.com](mailto:info@icomcanada.com)  
URL: <http://www.icomcanada.com>

### Icom (Europe) GmbH

Communication Equipment  
Himmelgeister Str. 100,  
D-40225 Düsseldorf, Germany  
Phone: +49 (0211) 3364047  
Fax: +49 (0211) 333639  
E-mail: [info@icom-europe.com](mailto:info@icom-europe.com)  
URL: <http://www.icomeurope.com>

### Icom France s.a.s.

Zac de la Plaine,  
1 Rue Brindejone des Moulinais, BP 45804,  
31505 Toulouse Cedex 5, France  
Phone: +33 (5) 61 36 03 03  
Fax: +33 (5) 61 36 03 00  
E-mail: [icom@icom-france.com](mailto:icom@icom-france.com)  
URL: <http://www.icom-france.com>

### Beijing Icom Ltd.

10C07, Long Silver Mansion, No.88, Yong Ding  
Road, Haidian District, Beijing, 100039, China  
Phone: +86 (010) 5889 5391/5392/5393  
Fax: +86 (010) 5889 5395  
E-mail: [bjicom@bjicom.com](mailto:bjicom@bjicom.com)  
URL: <http://www.bjicom.com>

### Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,  
Clayton, VIC 3168 Australia  
Phone: +61 (03) 9549 7500  
Fax: +61 (03) 9549 7505  
E-mail: [sales@icom.net.au](mailto:sales@icom.net.au)  
URL: <http://www.icom.net.au>

### Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"  
08190, Sant Cugat del Valles, Barcelona, Spain  
Phone: +34 (93) 590 26 70  
Fax: +34 (93) 589 04 46  
E-mail: [icom@icomspain.com](mailto:icom@icomspain.com)  
URL: <http://www.icomspain.com>

### Icom Polska

Sopot, 3 maja 54, Poland  
Phone: +48 (58) 550 7135  
Fax: +48 (58) 551 0484  
E-mail: [icompolkska@icompolkska.com.pl](mailto:icompolkska@icompolkska.com.pl)  
URL: <http://www.icompolkska.com.pl>